

Compounding  
Various mixing

## E-CR glass

3B E-CR glass is boron-free and presents significantly improved corrosion resistance across a wide range of aggressive environments.


3B glass is E-CR according to ASTM D578 and ISO 2078. This translates into important benefits for end-users over traditional E-glass: longer service life, larger safety coefficients for the same design, and material savings.

Traditional E-glass includes boron and often contains added fluorides. By using new manufacturing technology to eliminate these components from the glass composition, 3B E-CR glass has become a benchmark for integrated pollution prevention and the highest energy efficiency – all in an optimized process.

3B measures its efforts and works continually to minimize its impact on the environment and to set new standards within the global fibreglass industry. This is our commitment.

## MF 01 ER

Milled Fibre

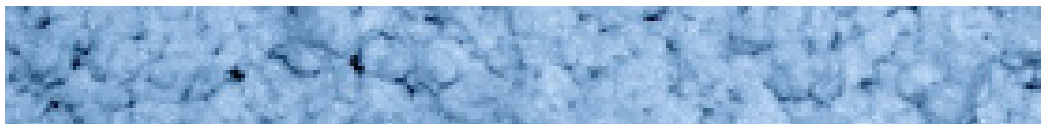

### Product Description

3B Milled Fibre are E-CR glass filaments ground to a specified density. MF 01 ER is designed to reinforce products like thermoplastics, thermoset resins, glues, coatings and adhesives within a large range of applications and markets.

MF 01 ER represents a main improvement compared to minerals when aiming a higher stiffness and/or better impact properties in combination with specific properties, such as flow


enhancement, flame retardancy, uniform isotropic shrinkage, resistance to acid environment, coating stability, etc.

MF 01 ER can be collocated in between mineral fillers and most commonly available milled fibres as it displays an intermediate length/diameter aspect ratio. The product comes in a powdery form that provides both improved flowability/handling and low density.

| FEATURES                             | BENEFITS   |
|--------------------------------------|--|
| Using Milled Fibre will bring you... | <ul style="list-style-type: none"> <li>• Reduction of deformations, better dimensional stability and shrinkage control</li> <li>• Improved thermal properties</li> <li>• Flame retardant effect</li> <li>• Higher resistance to abrasion</li> <li>• Anti-crack effect in gel coating and paints</li> <li>• Viscosity increase</li> </ul> |
| Powder form                          | <ul style="list-style-type: none"> <li>• Good flowability and easy to blend into resin or liquid</li> <li>• Increased productivity</li> <li>• Excellent surface finishing</li> </ul>   |

# MF 01 ER

Milled Fibre

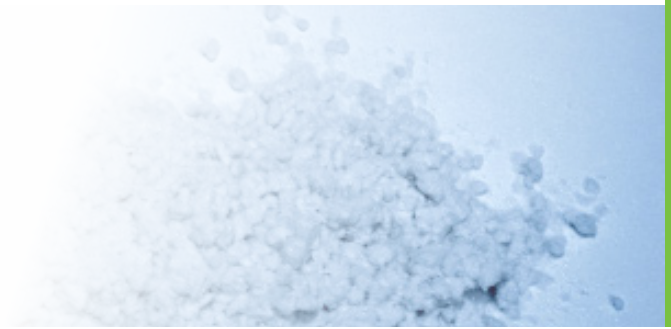

## PRODUCT CHARACTERISTICS

| Product name | Tamp density<br>ml/100gr | Morphology | Aspect ratio<br>Length/diameter | Solids content<br>% |
|--------------|--------------------------|------------|---------------------------------|---------------------|
| MF 01 ER     | 50-85                    | Powdery    | 1,5                             | < 0,30              |

## PACKAGING

MF 01 ER is packed in specific 1000kg polypropylene bags for optimal feeding. Bulk bags are of sufficient strength to insure adequate protection during transit and stores.

The packaging stacking is not recommended.

## STORAGE

Storage in a cool and dry warehouse into their original packaging is formally recommended. Ideal storage conditions are a temperature between 15°C and 35°C and a relative humidity of 35% and 75%.

Opened packages should be released to prevent contamination of the product or discard.

If the following recommendations are followed, the glass fibre products should not undergo significant changes when stored for extended periods of time.

If the product is not stored under these conditions, it is strongly recommended to condition it in the work shop for at least 24 hours before use.



### Customer Service Office

Ildefonse Vandammestraat 5-7  
B-1560 Hoeilaart, Belgium

P. +32 2 402 2000

F. +32 2 402 2002

E. [3B-thefibreglasscompany@3b-fibreglass.com](mailto:3B-thefibreglasscompany@3b-fibreglass.com)

**Disclaimer of Liability** The data and information set forth in this publication is provided exclusively with the view to facilitating the selection of a product and/or service. The information contained in this publication is based on actual laboratory data and/or field test experience. We believe this information to be accurate, but do not guarantee in any manner its suitability to the user's process or assume any liability arising out of its use or performance. The user, by ordering the products and/or services described herein, agrees to be entirely responsible for thoroughly testing any application to determine its suitability before committing to production. It is key for the user to determine the properties of its own products and/or compounds when using a product and/or service herein described. We do not give any representation or warranty, express or implied, as to the accuracy or completeness of the data and information contained in this document, and shall have no liability to the user or any other person resulting from the use of or reliance on any such information. Further, we do not give any representation or warranty, express or implied, as to our products and/or services, including in respect of their merchantability and fitness for a particular purpose, and shall have no liability to the user or any other person resulting from the use of or reliance on any such products and/or services. Only those representations and warranties set forth in a supply agreement, when, as and if it is executed, and subject to such limitations and restrictions as may be set forth in such agreement, shall have any legal effect. Statements included in this document are not, and may not be construed as, representations or warranties or as inducements to infringe any patent or violate any law, safety code or insurance regulation. 3B reserves the right to modify the content of present document without notice and without incurring in any obligations.