

Pultrusion, Filament Winding,
Weaving

E-CR glass

3B E-CR glass is a boron-free glass and presents significantly improved corrosion resistance across a wide range of aggressive environments.


3B E-CR glass is an E-CR glass in accordance with ASTM D578 and ISO 2078.

This translates into important benefits for end-users over traditional E-glass: longer service life, larger safety coefficients for the same design, and material savings. Traditional E-glass includes boron and often contains added fluorides. By using new manufacturing technology to eliminate these components from the glass composition, 3B E-CR glass has become a benchmark for integrated pollution prevention and the highest energy efficiency – all in an optimized process.

3B measures its efforts and works continually to minimize its impact on the environment and to set new standards within the global glassfibre industry. This is our commitment.

SE 1010

Direct Roving for Unsaturated Polyester, Vinylester, Epoxy & Polyurethane Resins

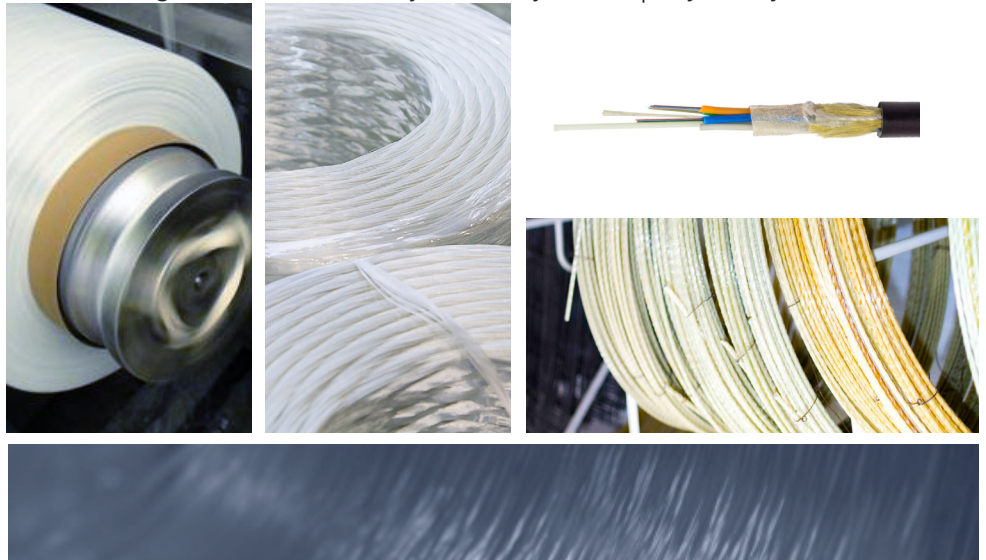

Product Description

3B Direct Rovings consist of continuous glass filaments bonded into a single strand and wound into a bobbin shape. A proprietary sizing applied on the fibres assures excellent resin-to-glass bonding.

Corrosion resistant SE 1010 Direct Rovings made of E-CR glass are specifically designed for Pultrusion where high glass packing is essential e.g. Central Strength Member for Cables and GFRP Rebar.

The sizing of SE 1010 is uniquely designed for excellent compatibility to a range of thermoset resins with various curing

systems and to protect the fibre while processing at high speed and high glass content.

SE 1010 Direct Rovings made of E-CR glass are also used in other processes such as Filament Winding and Weaving under specific conditions.

SE 1010 is tested in compliance with BS 14020 and IS 11320.

FEATURES	BENEFITS
Boron-free E-CR glass	Environment-friendly, offering high corrosion resistance
Unsaturated Polyester, Vinylester, Epoxy & Polyurethane compatible	Maximum flexibility on workshops and less inventory
Excellent processing	Easy unwinding, low fuzz generation
Strand integrity	Good impregnation where processing speeds are high

SE 1010

Direct Roving for Unsaturated Polyester, Vinylester, Epoxy & Polyurethane Resins

PRODUCT PORTFOLIO

Product Name	Filament diameter µm	Linear Density tex (g/km)	Solid content % by weight	Moisture content % by weight
SE 1010	17	600	0.40	Max 0.20
SE 1010	17	1200	0.40	Max 0.20
SE 1010	17	2400	0.40	Max 0.20
SE 1010	24	2400	0.40	Max 0.20
SE 1010	24	4800	0.40	Max 0.20

Please contact us in case of specific requirement.

FIBRE PROPERTIES

Fibre density	Tensile Strength (ASTM D2343-08)	Tensile Modulus (ASTM D2343-08)
2.62 g/cm ³	2200-2500 MPa	81 GPa

PACKAGING

Bobbins are individually tack wrapped for protection, complete unwinding of the bobbins, improved handling and to allow optimum transfer from bobbin to bobbin (Creel-Pack).

Two pallet configurations are available:

- Bulk-Pack: standard packaging, consists of individual bobbins
- Creel-Pack: bobbins are connected together for continuous unwinding (no bobbin handling for operators).

Each bobbin and pallet is identified by a label.

STORAGE

Vertical storage in a cool and dry warehouse into the original packaging is formally recommended.

Ideal storage conditions are a temperature between 15°C and 35°C and a relative humidity comprised between 35% and 85%.

If these conditions are maintained, the glass fibre product should not undergo significant changes when stored for extended periods of time.

It is also strongly recommended to condition it in the workshop in a packed condition for at least 24 hours before use to prevent condensation. For optimal processing we recommend to use the product in ambient conditions (20°C-30°C and a relative humidity of 60%-65%).



Customer Service India

Survey N° 220, Village Covale
Taluka, Bardez, Goa 403513
India

P. +91 7038837967

3Bgoasales@3b-fibreglass.com

Customer Service Europe

Rue de Maestricht 67
4651 Battice
Belgium

P. +32 87692211

3B-thefibreglasscompany@3b-fibreglass.com

Disclaimer of Liability The data and information set forth in this publication is provided exclusively with the view to facilitating the selection of a product and/or service. The information contained in this publication is based on actual laboratory data and/or field test experience. We believe this information to be accurate, but do not guarantee in any manner its suitability to the user's process or assume any liability arising out of its use or performance. The user, by ordering the products and/or services described herein, agrees to be entirely responsible for thoroughly testing any application to determine its suitability before committing to production. It is key for the user to determine the properties of its own products and/or compounds when using a product and/or service herein described. We do not give any representation or warranty, express or implied, as to the accuracy or completeness of the data and information contained in this document, and shall have no liability to the user or any other person resulting from the use of or reliance on any such information. Further, we do not give any representation or warranty, express or implied, as to our products and/or services, including in respect of their merchantability and fitness for a particular purpose, and shall have no liability to the user or any other person resulting from the use of or reliance on any such products and/or services. Only those representations and warranties set forth in a supply agreement, when, as and if it is executed, and subject to such limitations and restrictions as may be set forth in such agreement, shall have any legal effect. Statements included in this document are not, and may not be construed as, representations or warranties or as inducements to infringe any patent or violate any law, safety code or insurance regulation. 3B reserves the right to modify the content of present document without notice and without incurring in any obligations.